

eclipse

S200C6

◆ PRODUCT INTRODUCTION

ECLIPSE S 200 C6 is a compact and lightweight 6 colors profile, with uniform color mixing, clear projection. Equipped with intelligent color management system CCS, to ensure the color consistency. Built-in 1800-10000K high CRI CCT and 48 common used colors. Its integrated structural design, holding the sharp shutter framing system, and manual zoom 25-50°. It is perfect for theaters, multi-functional hall, church, conference room, and TV stations applications etc.



◆ PRODUCT PARAMETERS

Optical system

Light source: 200W RGBALC
Luminous flux: 7768lm
CCT: 1800K-10000K
CRI Ra: 97
Angle: Manual Zoom 25-50°

Control System

Dimmer: 0-100% 16Bit
Cooling: Forced convection
Control: DMX/RDM
Display: On board Control, 0-25Hz Strobe
Con Personality: BASIC (3CH), SSP (7CH), TOUR (12CH), TR16 (18CH), HSIC (7CH), CMY (10CH)
Framing system: 4 blades, manual shutter

Appearance

Size: 568 x 224 x 191mm
Weight: 6.1kg
Casing: Flame-retardant plastic (V0)
Color: Black

Electrical Specs

Voltage: AC100-240V, 50/60Hz
Rated Power: 200W
Power Connection: Power in and out
DMX XLR: 3pin or 5pin in and out


Work Environment

Ambient Temp: 0°C-45°C
IP Rated: IP20


Certification

CE, MET

◆ ILLUMINANCE AT DISTANCE

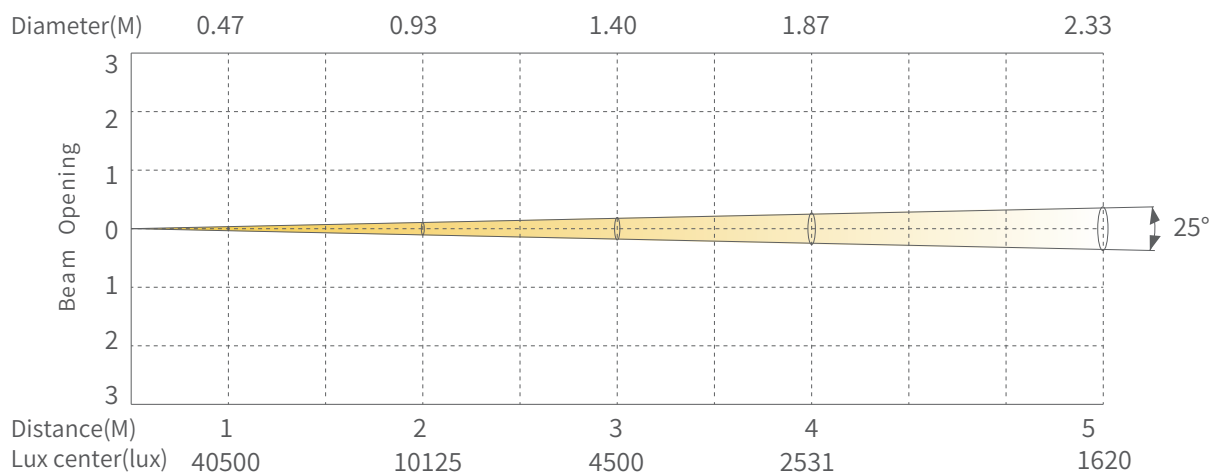

◆ DIMENSIONS

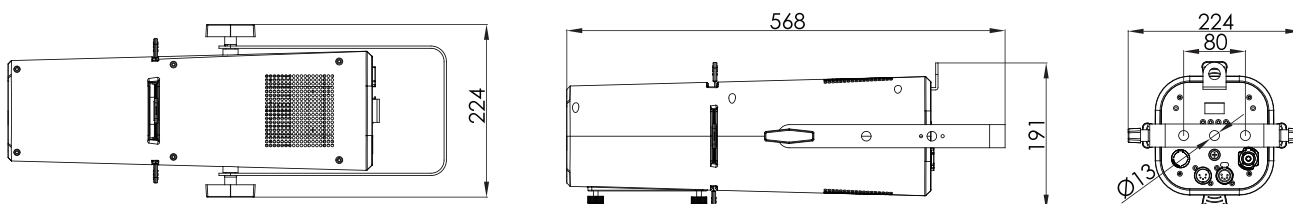

◆ ACCESSORIES (Accessories not included unless otherwise stated)

