

SPECTRA

◆ PRODUCT INTRODUCTION



◆ PRODUCT PARAMETERS

Source: 48x 8W RGBWA LEDs

LED PWM Frequency: 600 – 25000Hz

Colour Temperature: 2500K – 10000K

CRI Ra: 90

Beam Angle: 60x10 degrees lens (85x25 degrees field angle)

Strobe: 0-20Hz

Dimmer: 0-100%

Control Protocols: DMX512A, RDM ANSI E1.20, wireless DMX (LumenRadio CRMX) and mobile application

Tilt Movement: 0-360 degrees (manual adjustment)

Cooling: convection

Working Temperature: -40°C - 45°C

Max. Power Consumption: 360W

Dimensions: 378 x 140 x 213 mm

Weight: 7 Kg




IP Grade: IP65

Rigging: 1x omega clamps and/or holes for clamp screw fixation

SPECTRA



DIMENSIONS

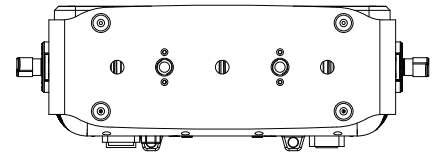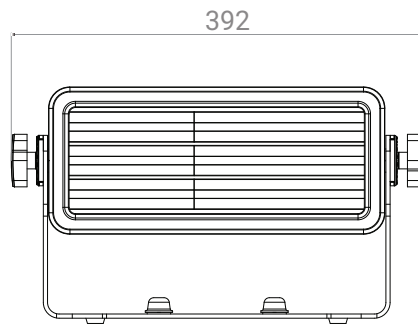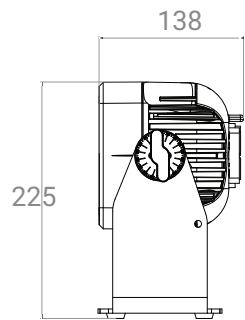

ACCESSORIES



barndoor



one sided barndoor



magnetic frost filter
(15°, 20°, 40°, 60X10° optional)



safety rope



suspension clamp