

eMOTION WASH

■ PRODUCT INTRODUCTION



■ PRODUCT PARAMETERS

Source: 12x 20W RGBL LEDs

LED PWM Frequency: 600 – 25000Hz

Colour Temperature: 2500K – 10000K

CRI Ra: 90

Brightness: 7040 lumens (66,73 lumens/watt); 2262 lux @ 5m

Beam Angle: 10 degrees (19 degrees field angle)

Dimmer: 0-100%

Control: mobile application (bluetooth), wireless DMX (Lumen-Radio CRMX)

Control Protocols: DMX512A, RDM ANSI E1.20

Pixel Control: yes

Battery Working Time (Auto Mode): 8H, 12H, 16H

Battery Working Time (Full Light): 4H, 6H, 8H

Battery Charging Time: 6H

Battery Life: 1000 cycles

Tilt Movement: 0-120 degrees (manual adjustment)

Cooling: convection

Working Temperature: 0°C - 40°C

Max. Power Consumption: 160W


Dimensions: 399 x 154 x 282 mm

Weight: 7 Kg

IP Grade: IP65

Rigging: 1x omega clamp

DIMENSIONS

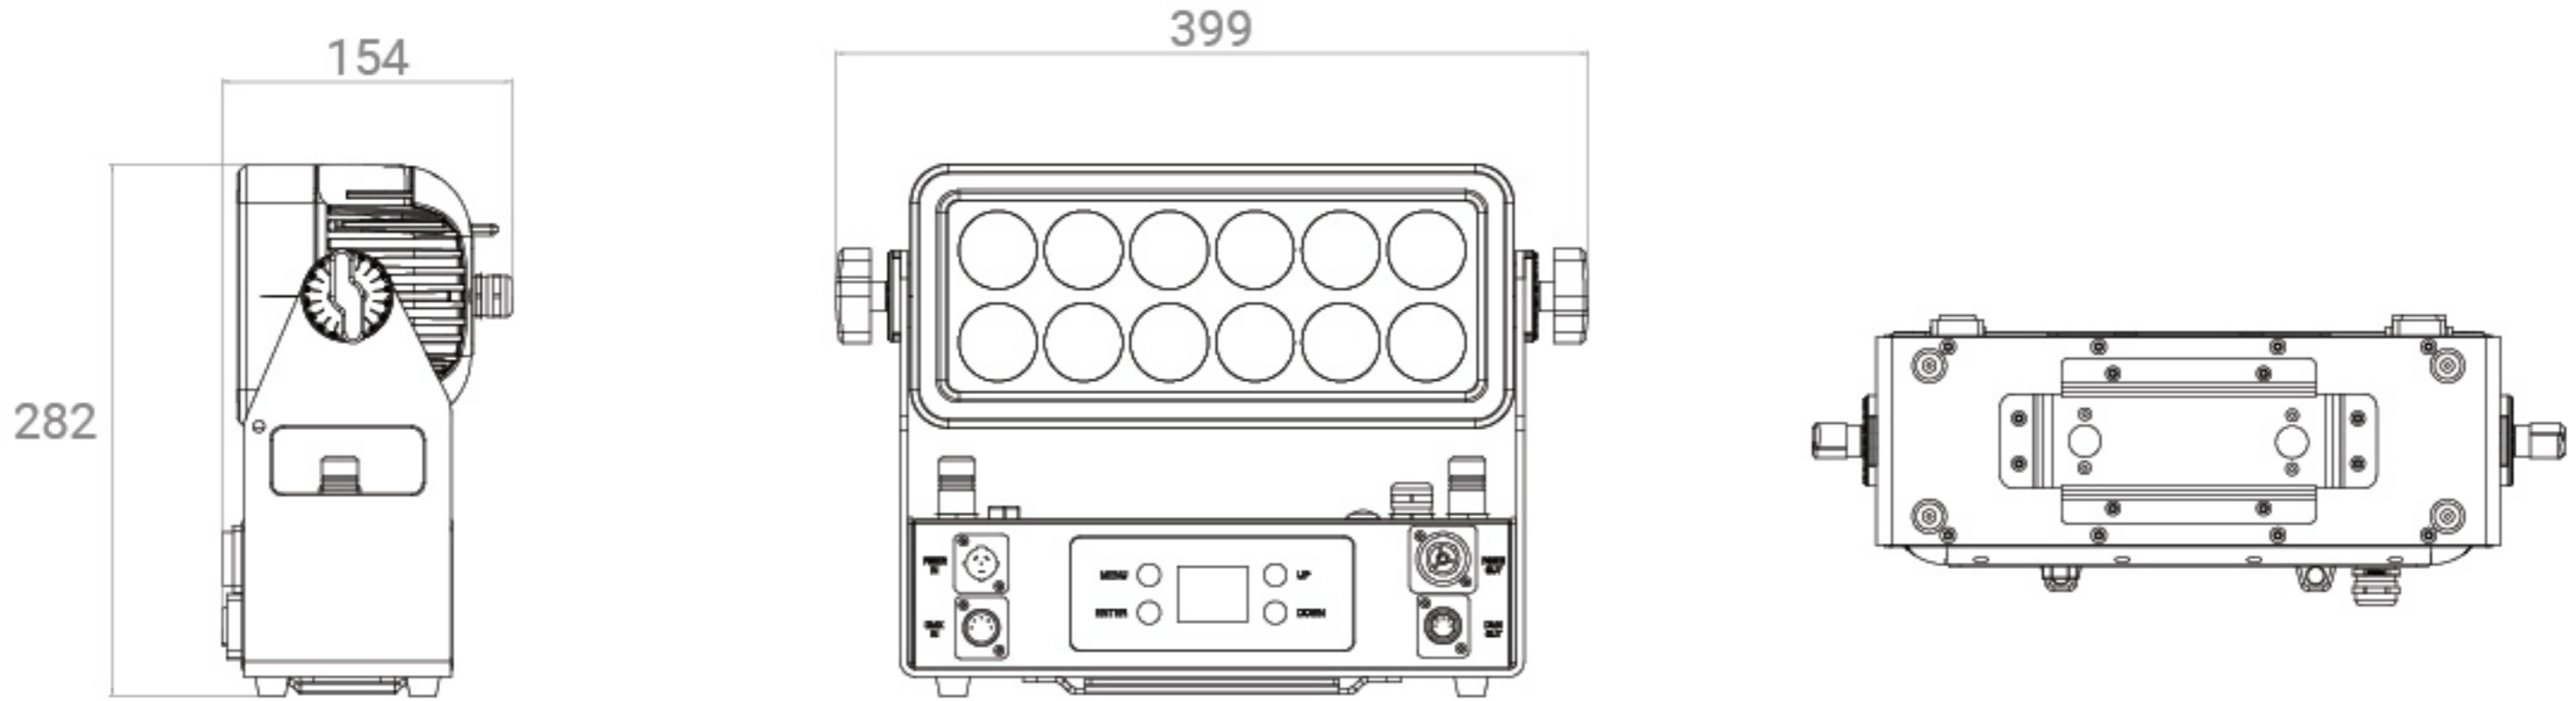

ACCESSORIES



barndoor



one sided barndoor



magnetic frost filter
(15°, 20°, 40°, 60X10° optional)



safety rope



suspension clamp



Recharging Flight Case